

the toolmaker
GOVONI[®]

...just *blue*, just perfect!

CE

5 kW

APPLICATION



HEAT INDUCTOR



THREE-PHASE

GO CODE **1473**

1 with 1 pcs. **kg** 66 kg

SINGLE-PHASE

GO CODE **1475**

1 with 1 pcs. **kg** 66 kg

THE**TOOL**MAKER.COM

...just *blue*, just perfect!



HEAT INDUCTOR 5KW

- Induction heating is a non-contact method that can be used to heat metals. The induction heater creates an alternating magnetic field that generates induced currents within the material. It is these induced currents that generate heat.
- The absence of open flames makes work easier, while ensuring safety and economic savings at the same time.
- It allows you to work even close to heat-sensitive parts.

Heat inducers are ideal for a wide range of applications such as:

- Unlocking bolts/nuts
- Unlocking and replacing pins or bearings
- Suspension, shock absorbers and mufflers removal
- Bending
- Crankshaft straightening



ADVANTAGES

POWER LEVEL SETTING (KW)

KEYBOARD

INDUCTOR CABLE 3M

READY TO USE WITH TIP

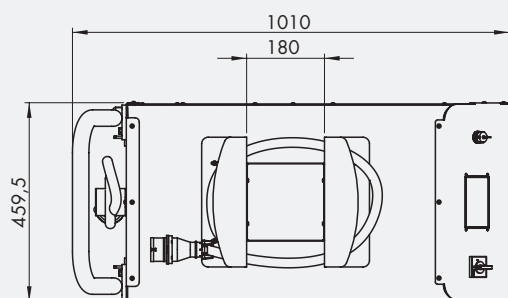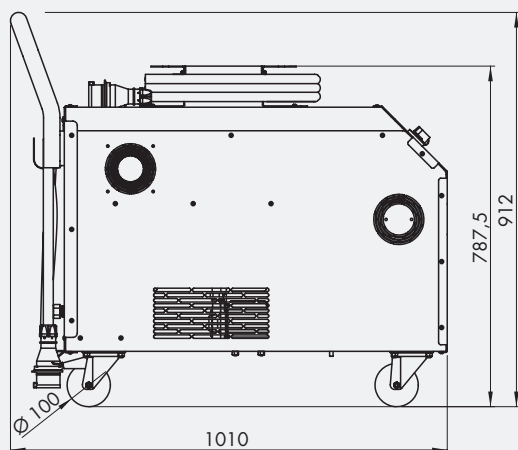

Technical data

GO1473	GO1475
Input power 5 KW-16 A, IEC60309 electrical connection	
Voltage 400V 3PH+T 50	Voltage 220V 1PH+T 50
Frequency level 15-30khz	
Work cycle 30 min*	
(* ± 5% ambient temperature maximum power)	
8 m of electrical cable	
IP21 protection rating	
Protection fuses	
20 liter tank capacity with liquid cooling system	
Hydraulic heat exchanger with fan	