



"VIBROFIGHTER" UNIVERSAL VIBRATION TOOL




Technical data

- CE approved machine in compliance with 2006/42/CE (Machine Directive)
- Working pressure: 6.2bar
- For tie rod min. Ø10 mm - max Ø25 mm

AIR CONSUMPTION		
	Dry cycle consumption	Charge cycle consumption
m³/h	0,18	at max opening 0,13 at minimum opening 0,05
lt/min	3.00	at max opening 2,17 at minimum opening 0,83

- It releases very seized injectors, due to carbonization and rust, without damaging the cylinder head and without breaking the injector, which would leave residues inside the head. Can be used on any injector extraction set.
- When this tool is used, it acts directly on the removal tie rod, which is dynamically coupled with the injector, through vibrations and pulses.

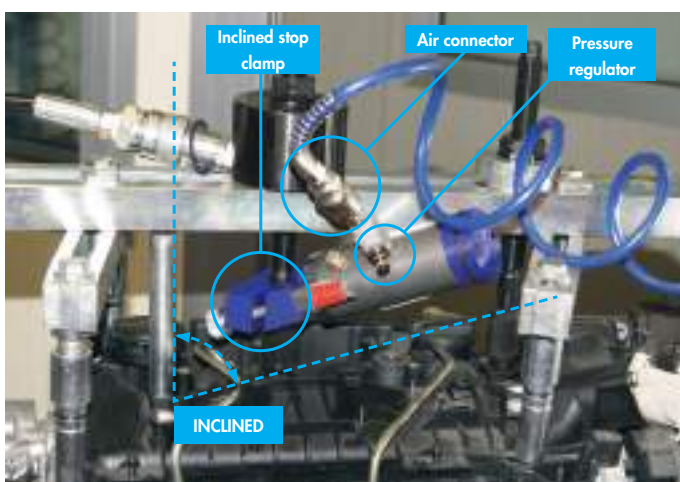

GO CODE **490**
 1 with 6 pcs. **kg** 3 kg
 § **PATENTED**



INJECTOR EXTRACTOR KIT MASTER - BOSCH, DELPHI, DENSO



- Specific for disassembling very stuck injectors.
- The universal supporting feet adjustment, on the fixing screws of the head, ensures its use in different levels (l/r) as well as the possibility to adjust the slippage of the two side bars.

GO CODE **405**
 1 with 43 pcs. **kg** 21,3 kg
 § **PATENTED**