



SUPPORT FOR DETACHING AND REFITTING GEARBOXES AND AUTOMATIC TRANSMISSIONS



COMPATIBLE WITH MOST
COMMON GEARBOX
LIFTERS


Universally applicable for gearboxes, automatic transmissions and DSGs as well as differential gears etc.

- The front and rear supports and arms, which can be adjusted in distance and tilt angle, provide a secure grip during application and removal.
- The support is applied to the gearbox which can be tilted forwards/backwards and right/left, always ensuring a **secure grip**.
- The tool include adapter for hydraulic gearbox lifter piston rod $\varnothing 30\text{mm}$.




Note

if the piston diameter is $\varnothing 25\text{ mm}$, the adaptor (Art-N. 391 018 002) is available upon request

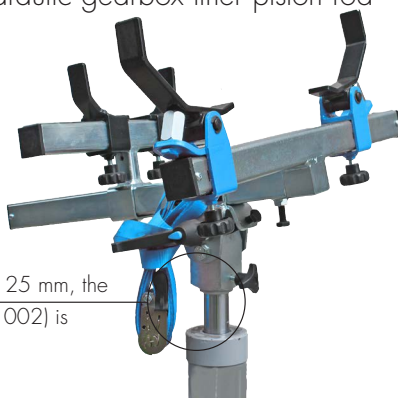


To be used together with a hydraulic gearbox lifter, it is particularly practical and quick for detaching and refitting gearboxes, in particular those for automatic transmissions.

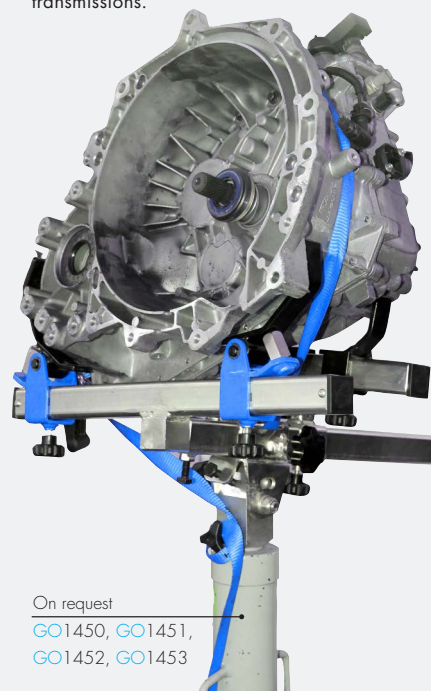

On request

GO1450, GO1451,
GO1452, GO1453



Technical data

Weight	12 kg
Max. load bearing capacity	150 kg
Length/width	490 mm/460 mm
Assembly	$\varnothing 40\text{ mm}$
Forwards/backwards tilt	$\pm 35^\circ$
Left/right tilt	$\pm 5^\circ$

Components

- 1 x support with arms for attachment to the gearbox, fixing strap included
- 1 x adapter for hydraulic gearbox lifter piston rod $\varnothing 30\text{mm}$



925

1 with 2 pcs.

kg 12 kg

§ **PATENT PENDING**

