



VORTEX PNEUMATIC MACHINE WITH
2 TANKS FOR REPLACEMENT
RADIATOR FOR HEAVY AND
COMMERCIAL VEHICLES

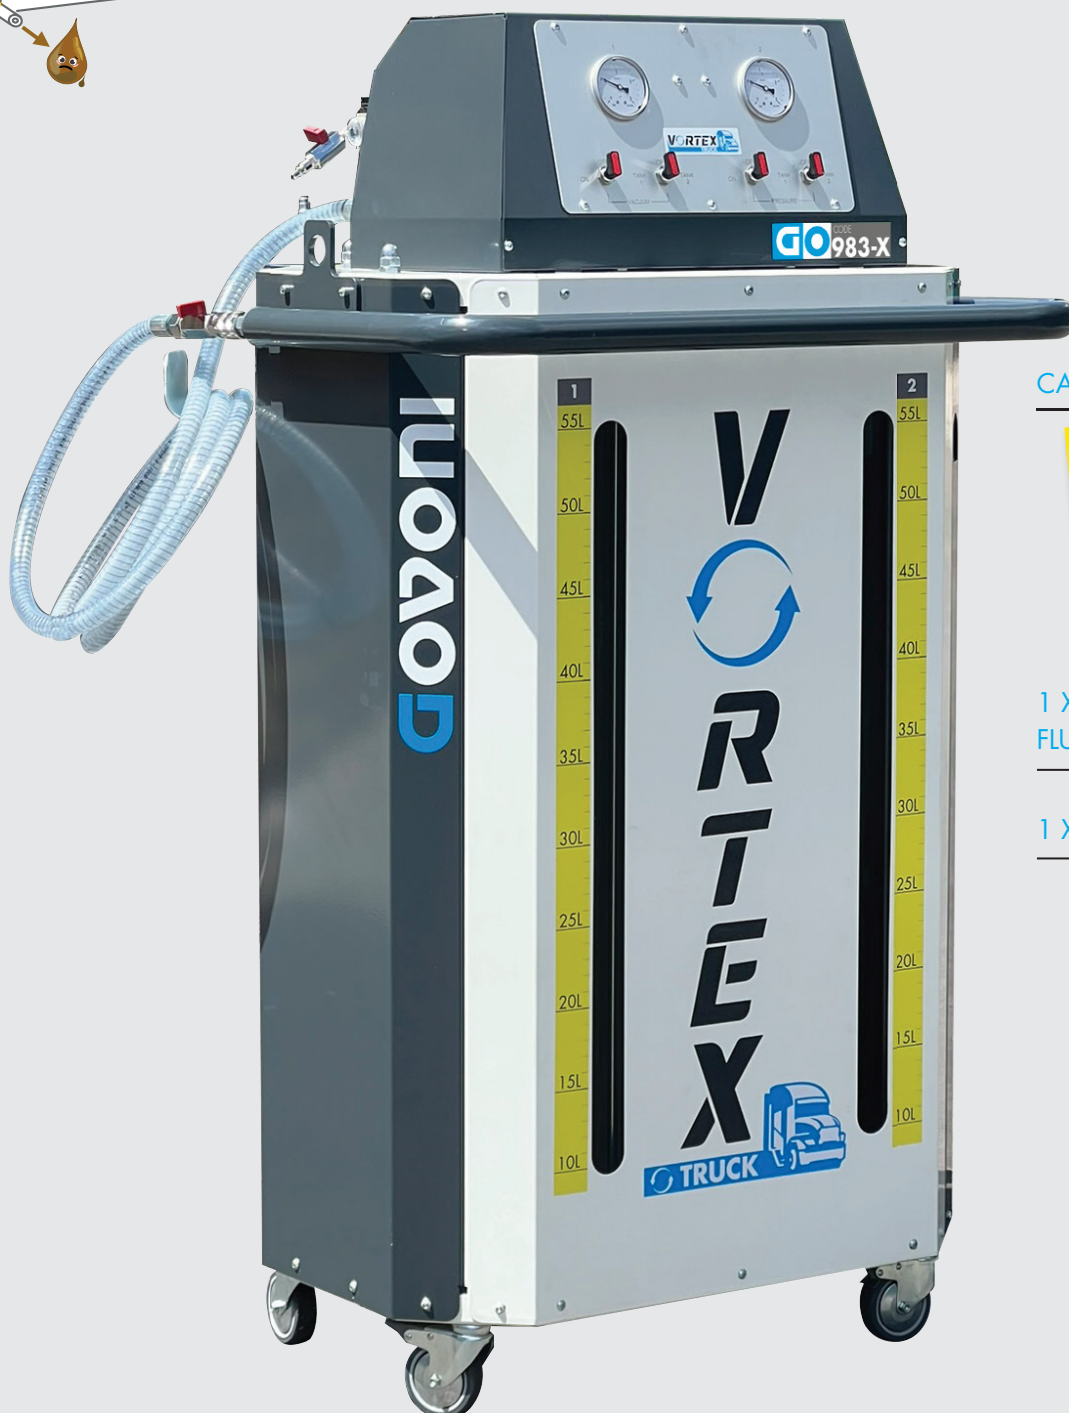

GO983-X

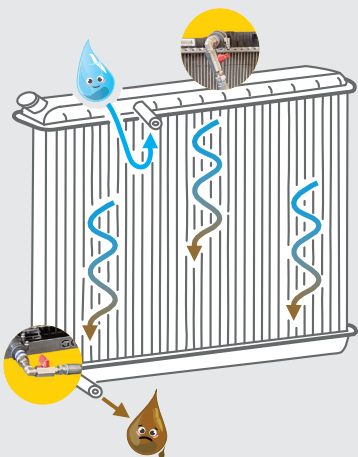

CAPACITY: 120 LITRES

**60 LITRES
PER TANK!**
! NEWS 2026 !

1 X TANK FOR EXHAUSTED
FLUID

1 X TANK FOR NEW FLUID



This mobile device is powered by compressed air. Designed for work on heavy vehicles, allows you to drain, check the sealing, clean, create a vacuum to purge the cooling circuit and fill it.

in the cooling system, to avoid dispersion of liquid in the environment and on the workshop floor and allowing the user to dismantle any component of the engine without of coolant.

It guarantees an ecological working since there is no need to open any drainage, by recovering all the coolant used

PNEUMATIC MACHINE

DRAIN, CHECK THE SEALING, CLEAN, CREATE A
VACUUM,

ALL IN ONE DEVICE!

Made with two transparent tanks, it allows you to clearly see the color and quantity of the liquid.

» Due to its construction features, the 2 liquids have no possibility of mixing and contaminating each other.

» It has easy coolant selection/change, user friendly.

the toolmaker
GOVONI[®]
...just blue, just perfect!

FEATURES

Control panel

Control panel for tank pressure/
vacuum management




Drainage hose

Independent hose for each tank;
increased cross-sections for rapid
intervention



Supply unit

consisting of interchangeable
quick coupling for connection to
the pneumatic network, tap valve,
pressure regulator and pressure
gauge

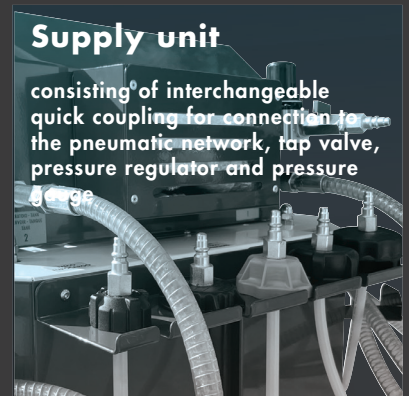


Wheels

Swivel wheels for maximum
manoeuvrability and transport



Control loops

The machine frame is fitted with slots
to instantly display the machine's
activity status

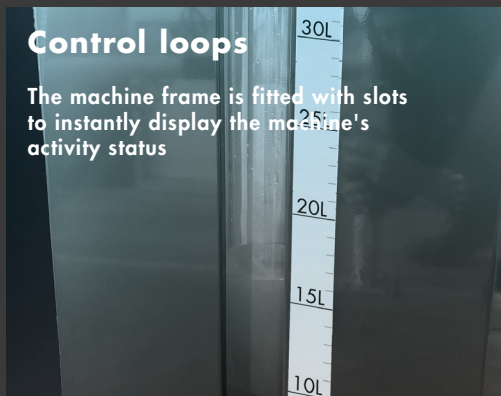

...just blue, just perfect!

A D V A N T A G E S

01

Check.

Cooling circuit leak detection.

02

Filling.

Filling of vehicle's cooling system
by pressure.

03

Washing.

Radiator washing cycles up to 1
bar pressure

04

Tanks.

2 tanks: the liquids have no
possibility of mixing and
contaminating each other.

05

Fluid.


Intake fluid filling



EACH UNIT IS INDIVIDUALLY
TESTED BEFORE SHIPMENT.

...just *blue*, just perfect!

DIMENSIONS

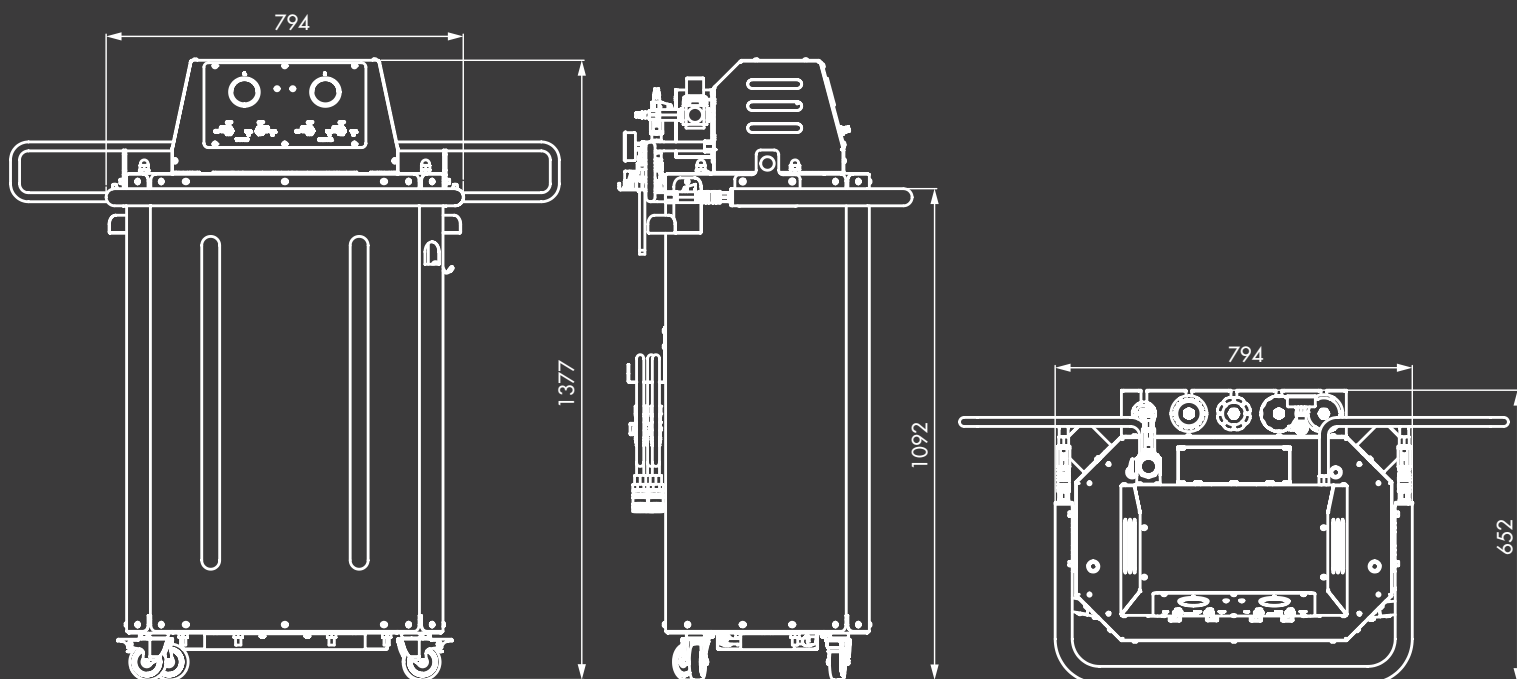

TECHNICAL DATA



Supply pressure	Max 8 MPa (bar)
Working pressure	0.8 - 1 max MPa (bar)
Number of tanks	2
Tank capacity	60 lt. each (tot. 120 lt.)
Weight	86 kg

COMPATIBILITY

Suitable for draining on all vehicles equipped with a quick coupling for access to the cooling circuit:

- RENAULT SERIE C, D, K, T
- VOLVO SERIE FL, FE, FM, FMX, FH
- SCANIA SERIE L, P, G, R, S, XT

Suitable for filling on all vehicles.

316014023	Cap SCANIA: 1.11147
316014024	Cap DAF/RENAULT: 545243
316014025	Cap MAN/IVECO/MERCEDES: 4.61594
316014026	Cap VOLVO: 2.15463
316014027	Cap IVECO EUROCARGO: 500359827



GOVONI SRL

Via degli Orsi, n. 97
40014 Loc. Beni Comunali |
Crevalcore (BO) Italy

Phone

(+39) 051.982688
(+39).051.980798

the toolmaker
GOVONI
...just blue, just perfect!

E-mail

info@govoni.it

Web

www.govoni.it

