



ULTIMATRON
FRANCE

5 YEARS
WARRANTY

Technical sheet

ULTIMATRON LiFePO4 Smart BMS Lithium Battery ULM-12-620

Compared with traditional batteries, our lithium iron phosphate batteries (LiFePO4) have many advantages:

- 5 years manufacturer's warranty
- The safest technology, without risk of fire or explosion
- Long service life
- Constantly improving storage capacity
- High stability even under extreme loads
- No memory effect, no need for full charge and discharge cycles
- High performance even under extreme conditions
- Deep and regular discharge and charging efficiency
- Small size and light weight

Integrated Battery Management System (BMS)

To allow the control and the charge of the different elements of an accumulator battery and to protect it against overcharging, overvoltages and overheating.



Note: Series and parallel connection for 12V, 24V, 36V, 48V applications.

Integrated Bluetooth 4.0 monitoring



You have all important battery data always on your smartphone or tablet. The application displays the data in real time.

MARQUE FRANÇAISE





ULTIMATRON
FRANCE

TECHNICAL SHEET


ULM SMART BMS SERIE 12.8V

ULTIMATRON LiFePO4 Smart BMS Lithium Battery ULM-12-620

ELECTRICAL PERFORMANCE

Nominal Voltage	12.8V
Nominal Capacity	620Ah
Capacity @ 80A	465min
Energy	7936Wh
Resistance	$\leq 15\text{m}\Omega$ @ 50% SOC
Self Discharge	<3% / Month
Number of Cycles	>6000@80%D.o.D

DIMENSION

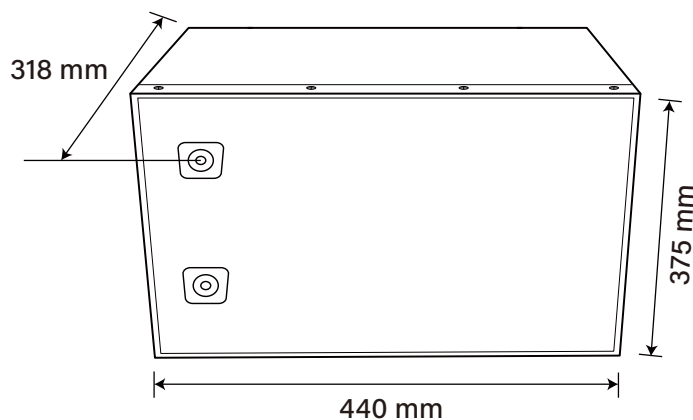

Dimension with terminals L440 * W375 * H318 mm

CHARGE PERFORMANCE

Recommended Charge Current	100A
Maximum Charge Current	150A
Recommended Charge Voltage	14.6 V
Charge Cut-Off Voltage	14.6V (2000ms)
Reconnect Voltage	$\leq 13.8\text{V}$
Balancing Voltage	>12.8V

MECHANICAL PERFORMANCE

Weight	61.65kg
Terminal Type	M8
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	Metal
Ingress Protection Code	IP62
Bluetooth	Bluetooth 4.0 with smartphone app

DISCHARGE PERFORMANCE

Maximum continuous Discharge Current	250A
Peak Discharge Cut-Off Current	800A $\pm$ 150A
Discharge Cut-Off Voltage	10V (2000 ms)
Reconnect Voltage	>11.2V
Short Circuit Protection	1560A $\pm$ 300A (200 ~ 600 μs)

COMPLIANCE

Certifications	CE UN38.3 UL1642 & IEC62133 ECE R10
Shipping Classification	UN 3480, CLASS 9

TEMPERATURE PERFORMANCE

Discharge Temperature	-20 ~ 75°C
Charge Temperature	0 ~ 50 °C
Storage Temperature	-5 ~ 35 °C

ULTIMATRON FRANCE

Add: 286 Rue Charles Gide, 34670 Baillargues, France

V1 12.08.25

✉ info@ultimatron-france.fr

☎ Tel: +33(0)9 50 42 76 17

