




SET FOR DIS/MOUNTING BEARINGS



Example of application

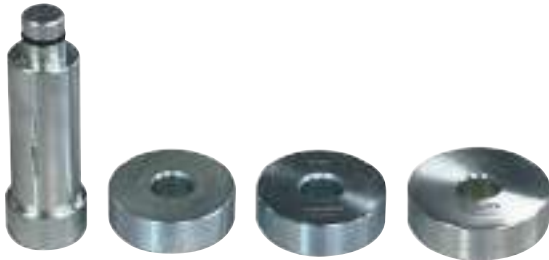

Components

- 1 x pin Ø 20÷34 mm.
- 1 x washer Ø 63 mm.
- 1 x washer Ø 65 mm.
- 1 x washer Ø 71.5 mm.

- This tool is used to insert bearing race and seals without damage to race and axle housing.
- Set of three rounded plates and one hammer, to fit most standard wheel bearings.
- Use this tool in coupling with a press machine. Don't use hammers.

GO CODE **045**
1 with 4 pcs. 2,4 kg



WHEEL BEARING CIRCLIPS PLIERS SET



- Plier designed for introducing and removing cars and light commercial vehicles wheel bearing circlips.



Components

- 1 x Ø tip 3.2 mm
- 1 x Ø tip 2.3 mm



GO CODE **801**
1 with 2 pcs. 0,6 kg



WHEEL BEARING CIRCLIPS PLIER



- Required for assembling and disassembling the wheel bearing elastic circlip without eyelet.

Application

Citröen, Hyundai, Kia, Nissan, Peugeot, Renault, Toyota, Lexus

GO CODE **802**
1 with 1 pcs. 0,2 kg