




EXTRACTION SET DRIVE SHAFTS AND CV JOINTS FOR HUBS



- Aimed to remove locked and tighten drive shafts, and by using the Govoni slide hammer GO520, also wheel hubs.
- Considerable time savings - no damage to the thread - wheel bearing is not damaged.
- Suitable for 2, 3, 4, 5 and 6-hole bolt pitch on hubs mounted on passenger cars and commercial vehicles.
- Optimized hole pitch for maximum coverage of models within the market.
- When an extreme forced is required, max till 17 Ton, use Govoni mechadraulic screw GO1016 or hydraulic cylinder GO1061 (optional).

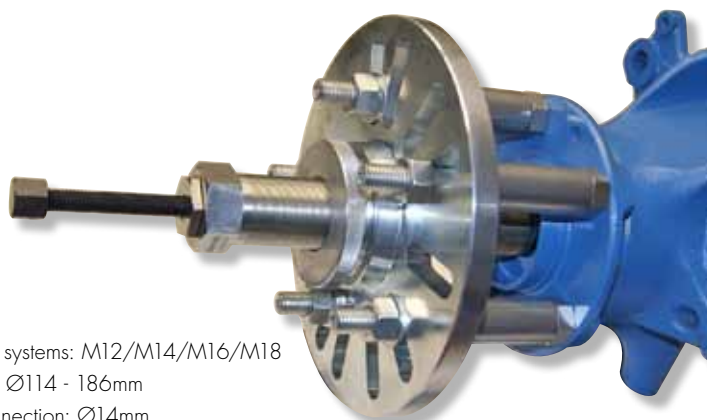

Technical data

- For nut and bolt systems: M12/M14/M16/M18
- Working range: Ø114 - 186mm
- Slotted hole connection: Ø14mm
- Tension bolt length: 80 mm

COMMERCIAL VEHICLES

Example of application

- 1 Uses the 17-ton/stroke 43mm Hydraulic cylinder (not included).



- 2 Uses the mechanical spindle provided in the supply

