




UPGRADE OPTION SET OF M12 AND M14 SPACERS



- Useful addition to Govoni's GO010 kit for the removal of CV joints.
- This kit ensures a strong flange connection with the hub and is also suitable for systems with wheel nuts and/or bolts. The user is not bound to the diameter of the hub edge since the hub's flange is placed 80mm or 90mm in front of the hub.

Components

- 1 x spacers kit for hub flange M12x1.25 (5 pcs.)
- 1 x spacers kit for hub flange M12x1.50 (5 pcs.)
- 1 x spacers kit for hub flange M14x1.50 (5 pcs.)

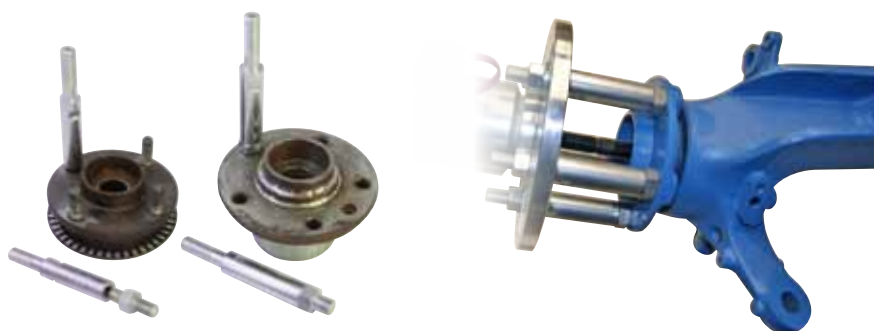

USE THIS KIT WITH THE
GOVONI CODE GO010



Example of application



Pushing out the drive shaft, mechanically using the tool set



Pulling out the wheel hub, using a slide hammer, optional code GO520 (optional)



Pushing out the drive shaft, using a 16-Ton mechatronic screw, optional code GO1016



Pushing out the drive shaft, mechanically on the workbench

