




SUPPORT FOR DETACHING AND REFITTING GEARBOXES AND AUTOMATIC TRANSMISSIONS



To be used together with a hydraulic gearbox lifter, it is particularly practical and quick for detaching and refitting gearboxes, in particular those for automatic transmissions.

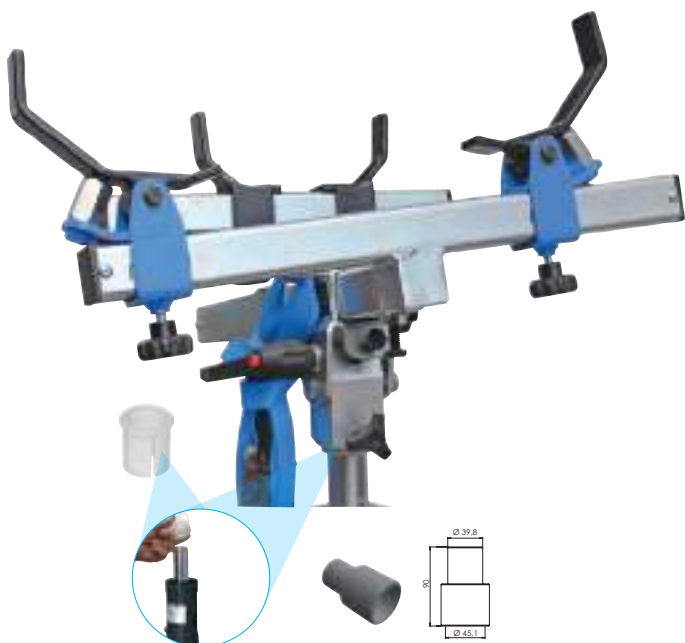

On request
GO1450, GO1451,
GO1452, GO1453

Even the front bar can be inclined of 5° in both directions, loosen the lower hexagonal screw on the main bar on the central part




- Universally applicable for gearboxes, automatic transmissions and DSGs as well as differential gears etc.
- The front and rear supports and arms, which can be adjusted in distance and tilt angle, provide a secure grip during application and removal.
- The support is applied to the gearbox which can be tilted forwards/backwards and right/left, always ensuring a secure grip.
- The tool include adapter for hydraulic gearbox lifter piston rod $\varnothing 30$ mm.

GO CODE **925**
with 3 pcs. **12 Kg**
§ PATENTED

Components

- 1 x support with arms for attachment to the gearbox, fixing strap included
- 1 x adapter for hydraulic gearbox lifter piston rod $\varnothing 30$ mm
- 1 x adapter 391018006 F45/M40.

+ SET OF ADAPTERS

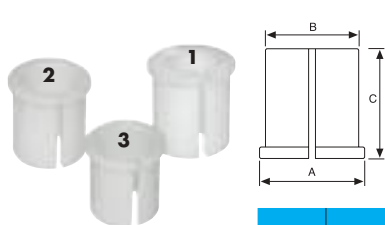

GO CODE **102**
with 3 pcs. **0,2 kg**

mod.	cod.	Ø ext. (mm)	Ø int. (mm)	L (mm)
1	391018002	40	25	50
2	391018003	40	30	50
3	391018004	40	35	50

