



## PRESS FRAME SET FOR SILENT BLOCK - 12 TON ALUMINIUM



### PLUS

THE ALUMINIUM PRESS WEIGHS ABOUT 50% LESS THAN THE STEEL PRESS.

THIS FACT MAKES IT MORE MANAGEABLE DURING CAR INTERVENTIONS.



### UPGRADE OPTION 12T HYDRAULIC CYLINDER

43 mm  
12 TON  
ALUMINIUM



#### Technical data

- Dimensions: Ø90x155 mm
- Pressure: max. 700 Bar
- Hole: Ø20 mm
- Connection: 3/8" -18 NPT
- Mounting thread: 2" 3/4-16 UN
- Adaptors: M10/M12/M14/M16/M18





**GOVONI** CODE **1060**  
with 7 pcs. 2,4 kg  
§ PATENTED



**GOVONI** CODE **1060Q**  
with 7 pcs. 2,4 kg  
§ PATENTED

- The compression frame is used to disassemble and assemble silent bearings, sockets and sleeves in passenger cars, SUVs and vans. The range of tools specially designed for this use provides the user with a very high level of flexibility in machining the most varied types of bushings, installation positions and sizes.
- Consequently, tight bushings (adherent), open and closed bushings or even particularly long bushings can be handled without any problems.
- The job can be done directly on the car or before assembly.

|   | MIN (mm) | MAX (mm) |
|---|----------|----------|
| A | 210      | 335      |
| B | 115      |          |

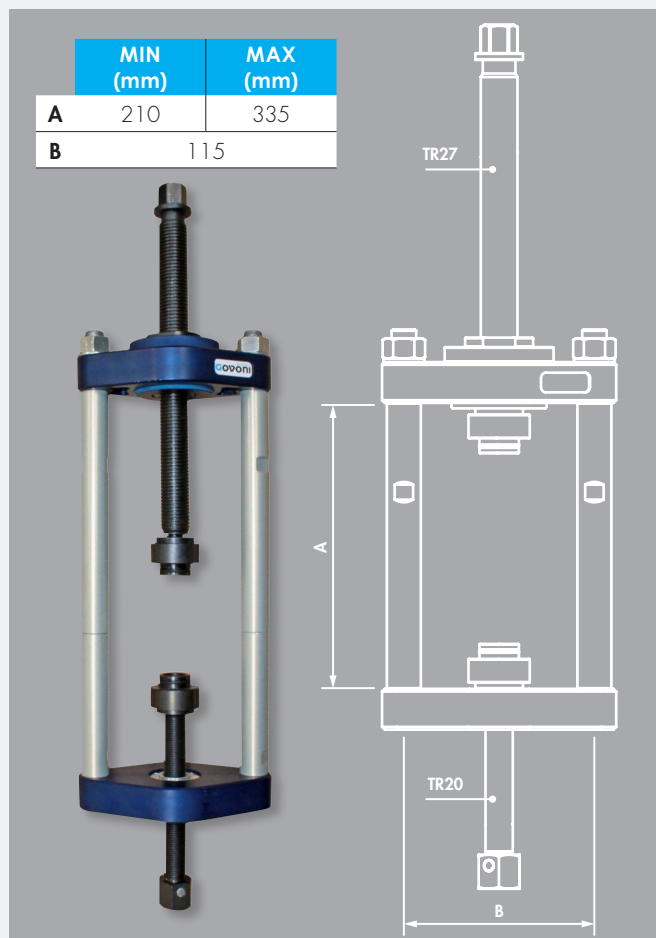

CODE **105**

1 with 6 pcs.

kg 10 kg