




TRANSMISSION JACKS TO REMOVE AND INSTALL ENGINE, GEARBOXES AND HEAVY PARTS OF THE HEAVY TRUCKS - 2 PISTON

5 TON **CE**

H MAX. 2065 mm

	TON	A	B	C	D	E	h max
GO1455	5	885	975	1090	600	700	2065
GO1456	5	885	975	1090	600	700	2065

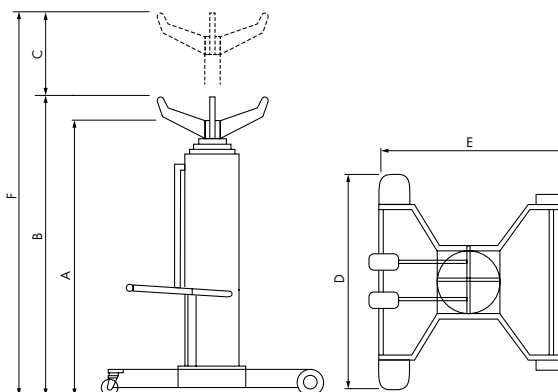

Retractable wheels under 900 kg load.

THE LIFTING IS EFFECTED BY TWO PEDAL PUMP: ONE FOR THE QUICK APPROACH AND ONE FOR THE WORKING PHASE.

The pneumo-hydraulic pump has been added in parallel to one manual pump; this pump deserves to ease the operator's psycho-physical work; in this way the work is speed up in the approaching hoisting and descent.

High pressure pump **1**

Low pressure pump **2**

Wide support base



OVERLOAD VALVE

HYDRAULIC	5 TON
GO CODE	1455
1 with 1 pcs.	kg 130 kg

PNEUMATIC	5 TON
GO CODE	1456
1 with 1 pcs.	kg 130 kg