





LIFTING FRAME WITH CHAINS FOR EV-BATTERY HANDLING

**CAPACITY
1500 KG**

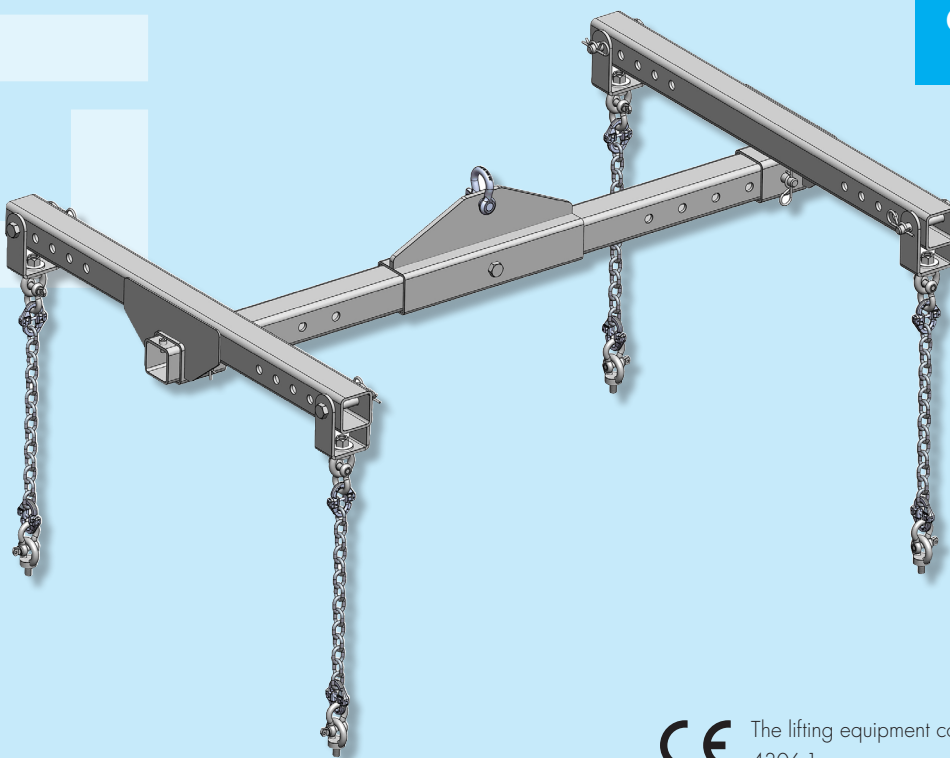

The lifting equipment complies with ISO 4306-1

- The **GO1505C** lift is designed to be used during professional and safe handling of batteries or other components, with a maximum total load capacity of 1500kg.
- It is equipped with 4 gripping points, equally distributed; which guarantee the stability of the load during movement.
- The equipment consists of a series of hooks and lifting chains for gripping the tools on the battery.
- The two side beams can slide along the main beam with a stroke of 300 mm each.
- The ends of the main beam are equipped with limit switches to prevent the crossbeams from slipping out if the instrument is used incorrectly.
- The gripper forks can slide along the side crossbars for a stroke of 200 mm each.

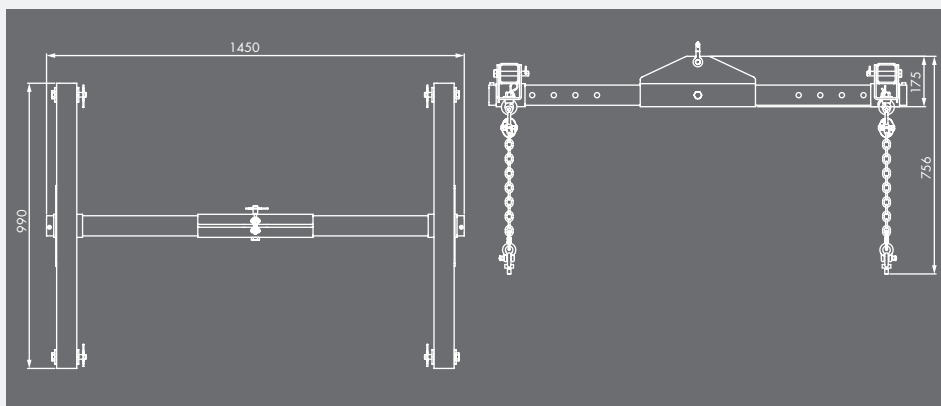

Technical Data

Dimensions 1450x990x180mm

Max. capacity 1500 kg

Main structure S355 – UNI EN 10025-2:2019


Locking pins viti M16

Central pivot C40
centre beam/main beam

Components

1 x main structure
2 x side crossbar


8 x eyebolts
4 x lifting chains



1 with 1 pcs.

kg 50 kg

THE FOLLOWING GRAPHICAL REPRESENTATION SIMULATES THE USE OF THE LIFTING FRAME IN COMBINATION WITH THE **GO1610L** WORKSHOP CRANE AND THE **GO1500T** BATTERY LIFT



with 1 pc.