




ELECTRO-HYDRAULIC DOUBLE SCISSOR LIFT LOW-PROFILE - 4 TON



Extensible platforms to reach the lifting points of the most demanding vehicles, equipped with a slide locking device.



standard connecting
pipes L = 3,5 mt



GALVANIZED BASE


Electro-hydraulic double scissor lift, ideal for light commercial and passenger cars.

- Equipped with safety valve to prevent overloading and in case of hydraulic pipe fracture
- Self-controlled lowering speed.
- Hydraulic circuit (MASTER-SLAVE) runway alignment control: hydraulic parallelism and synchronized alignment of the platforms independently from the load distribution.
- Audible alarm during the final lowering phase
- Low voltage 24 V "man standing-by" controls.
- Predisposition for inground*

THREE-PHASE	
GO CODE	3021
1 with 1 pcs.	kg 900 kg

NEW SINGLE-PHASE	
GO CODE	3021-M
1 with 1 pcs.	kg 900 kg

* For the construction of civil works, ask for detailed drawings

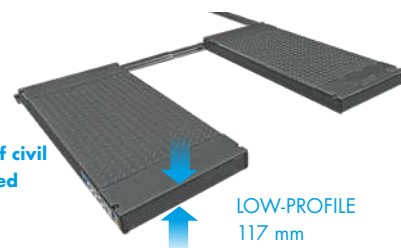

LOW-PROFILE
117 mm