



SLIDE HAMMER NON-IMPACT - 3 KG UNIVERSAL



- For powerful expulsion of stuck components as well as for body straightening work. The new slide hammer version is filled with a steel shot. This prevents the weight from bouncing back against the abutment.
- The impact intensity is thus increased because the full impact force is transmitted to the component to be machined.
- This version is also very gentle on the joints and allows fatigue-free working.




Technical data

- slide hammer 3 kg
- two-piece adjustable rod
L = 580 mm
- thread rod M18x1.5
- adaptor M18x1.5
- cardan joint M18x1.5
- screw and washer

GO	CODE	438
1	with 10 pcs.	kg 7,5 kg
§ PATENTED		

THE PRINCIPLE OF "NON-IMPACT"


Anti-rebound metal balls increase the impact force, which is transmitted entirely to the part to be removed.

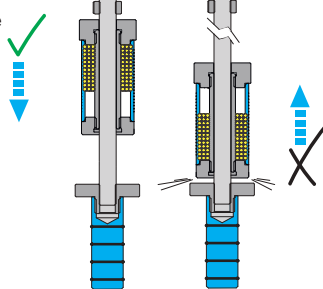

DOUBLE CONE BEARING REMOVAL KIT UNIVERSAL



- For the quick removal of wheel hubs and bolted wheel bearings.
- Simple and efficient method to remove front wheel hubs quickly and without too much effort in terms of assembly.

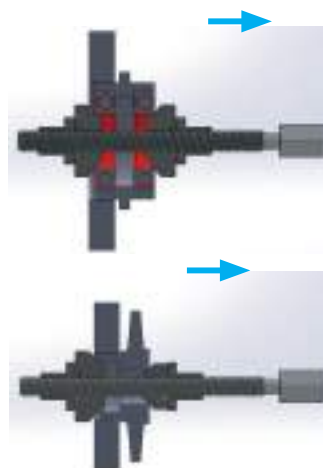

Application

Injectors, hubs, support joints, bodywork works



GO	CODE	439
1	with 14 pcs.	kg 10 kg