




ENGINE AND GEARBOX SUPPORT UNIVERSAL, 240 KG

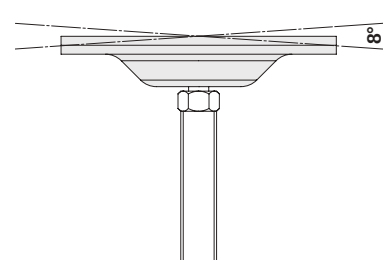

The supporting base, it's adjustable in height and it floats up to 8° to match perfectly to the engine/gear surface.
It's covered with a non-slip rubber

- This special device allows to support the engine when the side engine bracket is removed, e.g. during maintenance work on thrust bearings, timing belts, water pumps or tensioner rollers.
- Equipped with two sliding hooks to fit to underbody of vehicles.
- After loosening the engine mount, the engine support safely holds the vehicle engine in the engine compartment (time savings and higher safety at work).
- Thanks to this device, it is possible to work at the engine control (belt drive) without using engine cranes or transmission lifts, the engine compartment is freely accessible.

Technical data

- Telescopic arm (to 230 mm).
- Load capacity 240 kg
- Sliding telescopic arm extension: min. 657/max 887.
- Side-arms extension: min. 322/max 566.
- Arms rotation of 360°; the device can be closed completely in order to be stored in small spaces.
- Adapter for hydraulic transmission jakes Ø 40 mm

- The two supporting feet are adjustable in height to the vehicle frame, with the support components covered with polyurethane.
- CE approved machine in compliance with 2006/42/CE (Machine Directive).



INCLUDED:

the tool that allows to place the device firmly and balanced on a jack lift



GO CODE **640**
1 with 1 pcs. 11 kg
§ **PATENTED**

STANDARD



- Note: supplied with a plastic adaptor 391018006 F45/M40.

GO CODE **646**
1 with 2 pcs. 12 kg
PATENTED



optional

PLUS