




SELF ADJUSTING CLUTCH (SAC) MASTER SET

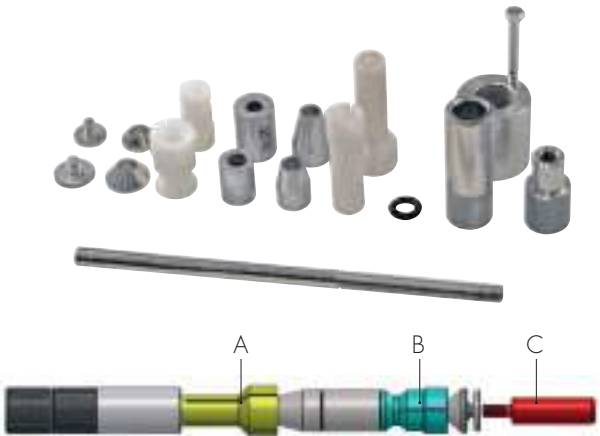

A	B	C
min. Ø15 mm max Ø27 mm	Ø15-21 mm Ø20-25 mm	Ø12 mm Ø14 mm Ø15 mm

- Using a specialized tool is an absolute must for ensuring the proper installation of the self-adjusting clutch.
- It avoids erratic adjustment of the adjusting ring in the clutch's mechanisms and thereby ensures smooth operation of the clutch after installation.
- Depending on the flywheel's hole pitch grouping (six or eight screws), the pressure plate must be setup to work with the truss with the correct number of arms.
- New centering pin to BMW clutch.
- Included the adjustable face pin (Ø5 mm) spanner wrench. To remove the compression plate of clutch (e.g. FCA, VW Group).
- **The set is the best complete assortment on the market!**



CODE **907**

1 with 54 pcs.

12,2 kg

§ **PATENTED**