




TIMING BELT CHECKING GAUGE PSA/OPEL, 1.0/1.2

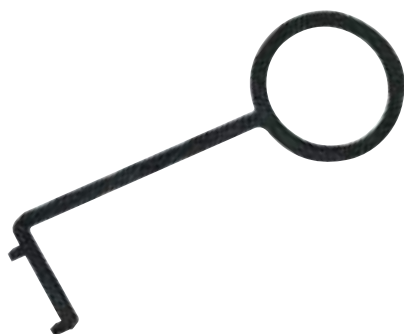

- This tool is used to assess toothed belt wear.

- **Special feature:**

The toothed belts of these motors operate in an oil bath. Due to the ageing process or lack of additives in the oil, the toothed belt structure may change or wear out.

The gauge is used to determine if the toothed belt width is within the maximum allowed size. If the belt deviates from the manufacturer's specifications, it must be replaced.



Application

Citroen 1,0/1,2 L/Peugeot 1,0/1,2 L/
Opel/Toyota 1,2 L

To be used as OEM

- PSA - 1643190080/G-0109-6
- Opel - EN-52809

GO CODE **945**
with 1 pcs. 0,1 kg



AUXILIARY BELT TENSIONER TOOL SET PSA



- Kit for tensioning the elastic and flat belts of the auxiliary parts of the PSA group vehicles.
- The special rectangular adapters ensure a perfect grip on the vehicle parts, and can be coupled to the most common wrenches on the market, making practical and quick the assembly and disassembly process of the belts on the auxiliary parts pulley.

Components	OEM CODE	ref.
1 x Basic connection adapter	OE 01099-A	1
1 x 8.7 mm automatic tensioner adapter	OE 01099-B1	2
1 x 10 mm automatic tensioner adapter	OE 01099-B2	3
1 x SW15 double hex adapter	OE-01099-C	4
1 x SW15 Hex adapter x square 1/2"	OE-01099-D	5

Application		
CITROËN		
FORD		
MAZDA	1.4; DV4TD; DW10FD; T3JA; W16D16; DV4TED4; UBGA; TZJA; 9HZ; DV6TED4; XVB; AEDA; D4164T; DV6ATED4; HHJC; G8DC; 2VZ-TV	OE PZ4L0-G0109-90
MINI	1.5; DV4TD; DW10FD; T3JA; W16D16; DV4TED4; UBGA; TZJA; 9HZ; DV6TED4; XVB; AEDA; D4164T; DV6ATED4; HHJC; G8DC; 2VZ-TV	
PEUGEOT	1.6; DV4TD; DW10FD; T3JA; W16D16; DV4TED4; UBGA; TZJA; 9HZ; DV6TED4; XVB; AEDA; D4164T; DV6ATED4; HHJC; G8DC; 2VZ-TV	
TOYOTA	2.0; DV4TD; DW10FD; T3JA; W16D16; DV4TED4; UBGA; TZJA; 9HZ; DV6TED4; XVB; AEDA; D4164T; DV6ATED4; HHJC; G8DC; 2VZ-TV	
VOLVO	2.2L Also suitable for DW10 and DW12 engines	



GO CODE **924**
with 5 pcs. 0,3 kg