






## SELF ADJUSTING CLUTCH (SAC) MASTER SET



- Using a specialized tool is an absolute must for ensuring the proper installation of the self-adjusting clutch.
- It avoids erratic adjustment of the adjusting ring in the clutch's mechanisms and thereby ensures smooth operation of the clutch after installation.
- Depending on the flywheel's hole pitch grouping (six or eight screws), the pressure plate must be setup to work with the truss with the correct number of arms.
- New centering pin to BMW clutch.
- Included the adjustable face pin (Ø 5 mm) spanner wrench. To remove the compression plate of clutch (e.g. FCA, VAG).
- **The set is the best complete assortment on the market!**

### Components

- 1 x standard centering tool with guide and clamp components
- 2 x plastic clamping sleeves for the clutch disk hub, Ø 15-28 mm
- 7 x centering pins for the pilot bearings Ø12-14-15-16-17-18-19mm
- 1 x specialized centering tool set for BMW, 8 pieces including handle (Ø15/23 - Ø15/26,5 - Ø15/26,5L - Ø15/28 - Ø15/32,5 - Ø15/32,5L - Ø15/34 + guaina speciale per centraggio)
- 1 x specialized centering tool set with 2 clamping components, 14 pieces
- 1 x 3-piece pressure plate with centering expander and handle
- 2 x trusses for groups of 3 holes and 4 holes
- 12 x mounting bolts, 4 each M6, M7 and M8
- 4 x lock nuts for the mounting bolts
- 1 x extractor tool
- 1 x face pin (Ø 5 mm) spanner wrench

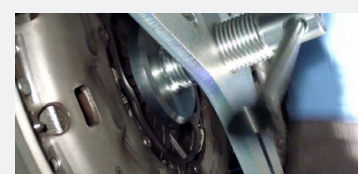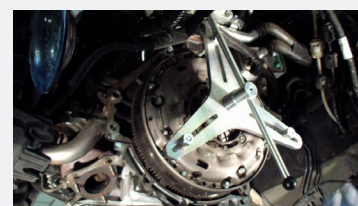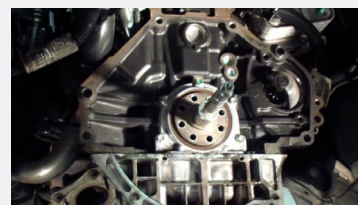

follow us  
on YouTube



**GO** CODE **907**  
1 with 54 pcs. kg 12,2 kg